


SPECIFICATIONS:



- Chemical System:** Zinc Air (Zn/O₂)
- Identification:** IEC-PR44
- Tab Color:** Green
- Build Standard:** IEC 60086-2:2000,
IEC 60086-2:2011
- Nominal Voltage:** 1.45 Volts
- Capacity (IEC 60086-2:2000):** 530 mAh (to 0.90 volts)
(Rated at 620 ohms at 20°C/ 60%RH)
- Capacity (IEC 60086-2:2011):** 470 mAh (to 1.05 volts)
(Rated at 8 mA continuous & 24 mA / 100 ms Pulses at 25°C/ 60%RH)
- Capacity Retention:** > 85%(after 3 years)
- Available Current:** 30 mA(at 1.1 volts)
- Tab Sealing Arrangements:** On Cathode Can. See picture above.
- Shelf Life:** 3 years
- Operation Temp:** 0°C to 50°C
- Typical Weight:** 1.62 grams (0.06 oz.)
- Typical Volume:** 0.56 cubic centimeters
(0.034 cubic inch)
- Impedance:** ≤ 4 ohms (at AC 1000Hz)

Industry Standard Dimensions

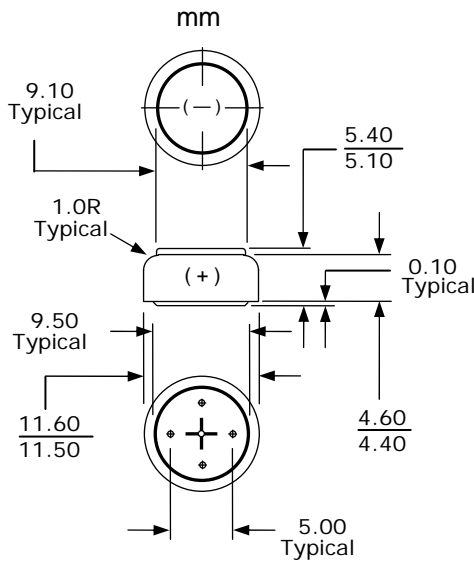


IEC 60086-2:2000 Standards

DISCHARGE CHARACTERISTICS AT 620Ω 20°C 60%RH
(Discharged 24 hours/day)



Construction

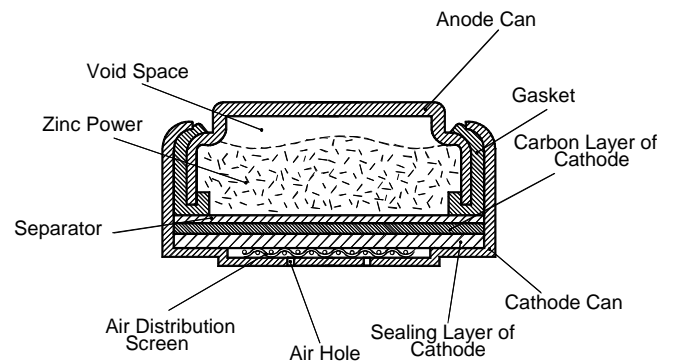

ZeniPower Battery Co., Ltd.

Building 10, Xiang Zhou North Industry Park,
Zhuhai, GD 519002, China

E-mail: info@zenipower.com

Home Page: www.zenipower.com


Tel: +86-756-252 6620 Fax: +86-756-252 6630

This data sheet is only based on our test conditions, and is subject to change without prior notice.
Contact us for the latest information.
Contents here do not constitute a warranty.

Sep. 2015

Discharge Charts of IEC 60086-2:2011 Standards

Hearing aid high drain

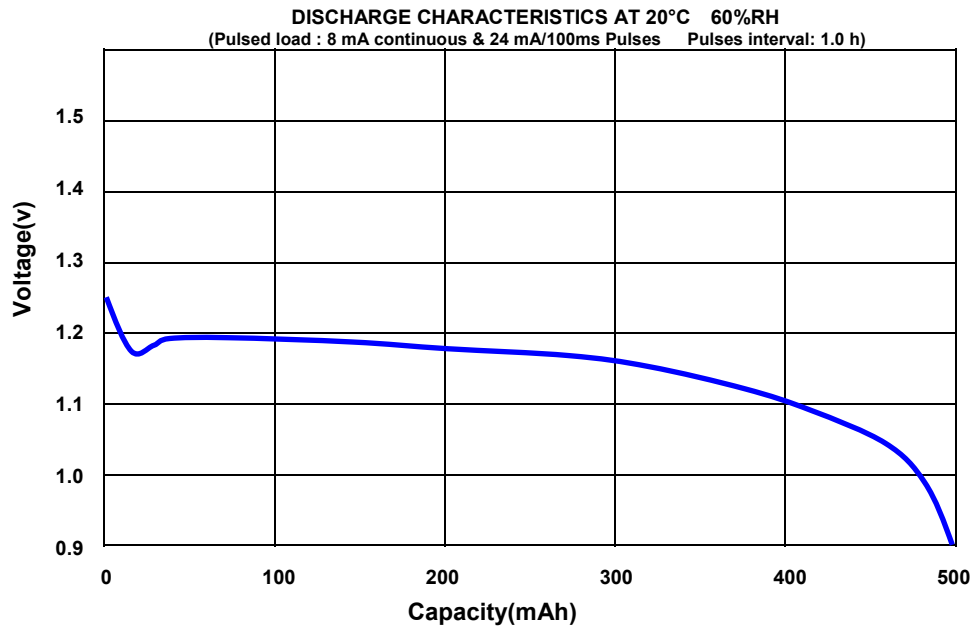

ZeniPower Battery Co., Ltd.

Building 10, Xiang Zhou North Industry Park,
Zhuhai, GD 519002, China

E-mail: info@zenipower.com

Home Page: www.zenipower.com

Tel: +86-756-252 6620 Fax: +86-756-252 6630

This data sheet is only based on our test conditions, and is subject to change without prior notice.
Contact us for the latest information.
Contents here do not constitute a warranty.

Sep. 2015